




**PlumbMaster, Inc.**

# NEW PRODUCT


## **JG** John Guest® *Speedfit*®

### THE PUSH-FIT SOLUTION FOR PLUMBING AND HEATING SYSTEMS

- Works with Copper, CPVC, and PEX
- No Tools Required
- Installation Time Reduced by 40%
- Grip and Seal Connection
- Superseal® Insert Gives a Secondary Seal
- Reduced Pipe Insertion Force
- Disassemble without Damage to Pipe or Fitting
- Easy to Use in Confined Spaces
- Max 160 PSI @ 73°F, 100 PSI @ 180°F, 80 PSI @ 200°F
- NSF, UPC & CSA Approved

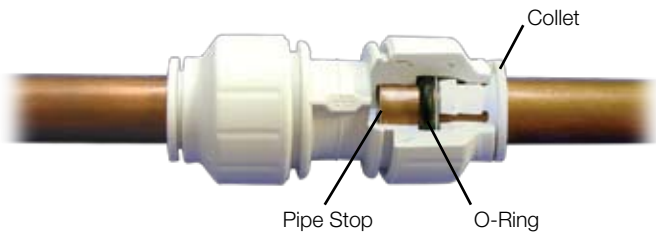

1. Push the pipe into the fitting and up to the pipe stop.

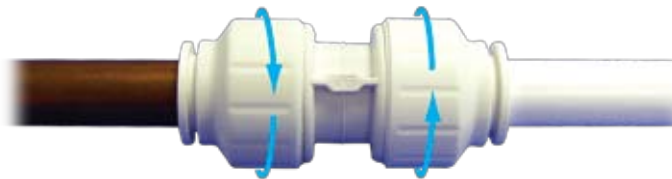

2. Twist the screw-cap until it touches the body flange. This locks the pipe into position and increases the o-ring seal around the pipe.



3. To remove, twist the screw-cap back to the unlock position and using fingers, push the collet square against the face of the fitting.



Cat. No.	OEM Ref. No.	Description
53150	PEI0220	1/2" CTS Union Tee
53151	PEI0228	3/4" CTS Union Tee
53152	PEI0236	1" CTS Union Tee



Cat. No.	OEM Ref. No.	Description
53153	PEI0320	1/2" CTS Union Elbow
53154	PEI0328	3/4" CTS Union Elbow
53155	PEI0336	1" CTS Union Elbow



Cat. No.	OEM Ref. No.	Description
53156	PEI0420	1/2" CTS Coupler
53157	PEI0428	3/4" CTS Coupler
53158	PEI0436	1" CTS Coupler



Cat. No.	OEM Ref. No.	Description
53159	PEI4620	1/2" CTS End Cap
53160	PEI4628	3/4" CTS End Cap
53161	PEI4636	1" CTS End Cap

MORE FITTING SOLUTIONS ON REVERSE PAGE



**PlumbMaster, Inc.**

**NEW PRODUCT**

## **JG John Guest®**

### **INCH POLYPROPYLENE FITTINGS**

The PP Range of inch-size push-in fittings are manufactured in white polypropylene with food grade EPDM o-rings. They have been developed to satisfy the compatibility needs for a wide range of applications.

- Max 150 PSI @ 70°F, 60 PSI @ 140°F
- Min 33°F / 1°C

<b>Cat. No.</b>	<b>OEM Ref. No.</b>	<b>Description</b>
<b>53162</b>	PP0208W	1/4 Union Tee
<b>53163</b>	PP0212W	3/8 Union Tee
<b>53164</b>	PP0308W	1/4 Union Elbow
<b>53165</b>	PP0312W	3/8 Union Elbow
<b>53166</b>	PP0408W	1/4 Union Connector
<b>53167</b>	PP0412W	3/8 Union Connector
<b>53168</b>	PP061208W	3/8 - 1/4 Reducer
<b>53169</b>	PP201208W	3/8 x 1/4 Reducing Union
<b>53170</b>	PP30121208W	3/8 x 3/8 x 1/4 Reducing Tee
<b>53171</b>	PP3208U7W	1/4 x 7/16-24 UNS Faucet Connector
<b>53172</b>	PP3212U7W	3/8 x 7/16-24 UNS Faucet Connector
<b>53173</b>	PP480821W	1/4 x 1/8 Fixed Elbow NPTF



Union Tee



Reducer



Union Elbow



Faucet Connector



Union Connector



Fixed Elbow

### **INCH POLYPROPYLENE VALVES**

- Water Max 150 PSI @ 70°F, 60 PSI @ 140°F
- Water Min 33°F / 1°C

Angle Stop Adapter Valve



Speedfit to Speedfit Shut-Off Valve



Speedfit to Female NPTF Shut-Off Valve



<b>Cat. No.</b>	<b>OEM Ref. No.</b>	<b>Description</b>
<b>53174</b>	ASVPP1	3/8 x 3/8 x 1/4 Angle Stop Adapter Valve
<b>53175</b>	ASVPP2	3/8 x 3/8 x 3/8 Angle Stop Adapter Valve
<b>53176</b>	PPSV040808W	1/4 - 1/4 Shut-Off Valve
<b>53177</b>	PPSV041212W	3/8 - 3/8 Shut-Off Valve
<b>53178</b>	PPSV500822W	1/4 x 1/4 Female NPTF Shut-Off Valve
<b>53179</b>	PPSV501222W	3/8 x 1/4 Female NPTF Shut-Off Valve

### **JOHN GUEST® STOCK-EZ KITS**



<b>Cat. No.</b>	<b>Description</b>
<b>53180</b>	John Guest® Speedfit® Stock-EZ Kit 26 Piece Total of 1/2", 3/4" and 1" Fittings Includes all Union Tees, Elbows, Couplers and End Caps
<b>53181</b>	John Guest® Inch Polypropylene Stock-EZ Kit 111 Piece Total of 1/4" & 3/8" Fittings Includes Tees, Elbows, Connectors, Reducers, Reducing Tees and Faucet Connectors