



**PlumbMaster, Inc.**



# NEW PRODUCT

## Haws Drinking Fountain Repairs



### Push Button Assembly MODEL PBA6



Model PBA6 flanged push button assembly is used with push button valve 5874, is made of polished chrome-plated brass, and includes the push button with front adjusting screw, operator, round locknut, snap ring, and wave washer. This model is used on flush mounted (not recessed) front stainless steel drinking fountain models.

**Cat. No. 33715**



### Push Button Assembly MODEL PBA5



Model PBA5 push button assembly is used with push button valves 5871 and 5872, is made of polished chrome-plated brass, and includes the push button with front adjusting screw, operator, brass locknuts, fiber washer and snap ring. Different drinking fountains use different push button assemblies.

**Cat. No. 33716**



### Push Button Assembly MODEL PBA4

Model PBA4 push button assembly is used with push button valves 5871 and 5872, is made of polished chrome-plated brass, and includes the push button with front adjusting screw, operator, brass locknuts, fiber washer and snap ring. Different drinking fountains use different push button assemblies.

**Cat. No. 33717**



### In-Line Strainer MODEL 6421


Model 6421 is an in-line strainer which features positive rubber seals molded onto a fine mesh screen and is retrofitted in most Haws drinking fountains. Located on the inlet side of the valve, this strainer provides protection from debris and contaminants. Strainer may be installed in-line using supplied 3/8" tubing connectors. Note: Model 6421 has replaced Model 6420.

**Cat. No. 33718**

Phone: 1-800-523-5130 • Fax: 1-800-338-1867 • [www.plumbmaster.com](http://www.plumbmaster.com)



# PlumbMaster, Inc.

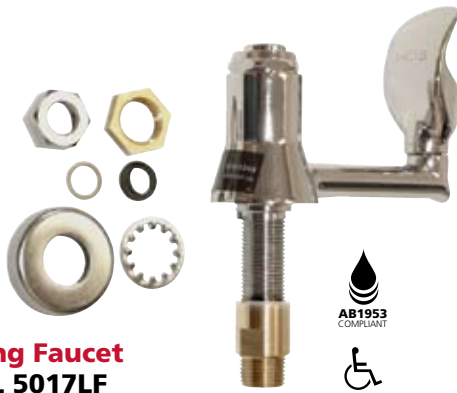

## Drinking Faucet MODEL 5017LF

Model 5017LF drinking faucet is designed with a shielded bubbler and self-closing push button with adjustable stream regulation to provide an anti-squirt drinking stream. Unit is to be mounted from sink or counter top and is constructed from a lead-free polished chrome-plated brass, making this bubbler valve resistant to corrosive materials and easy to keep clean.

- Drinking faucet includes: basin shank, locking pin, and mounting hardware.
- Dimensions: 2" high forged brass bubbler head with a 1/2" inlet.

Cat. No. 33719



## Push Activated Valve MODEL 5874SS

Model 5874SS, stainless steel push activated valve, front accessible for stream adjustment and servicing, replaceable pressure regulation control cartridge, with an operating pressure range of 30 to 90 psi.

- Connection is 1/4" IPS inlet and outlet.
- Note: Push button assembly not included. Spanner wrench is included.

Cat. No. 33721



## Valve Repair Kit MODEL VRK5872

Model VRK5872 is a valve repair kit for Model 5872. Includes push-button, adjusting spring, diaphragm ring slip, diaphragm assembly, valve stem, bottom spring, bottom plug "O" ring, and bottom plug.

Cat. No. 33720



## Push Activated Valve MODEL 5872

Model 5872, push button activation, front adjustable, automatic diaphragm pressure regulation with fully adjustable flow.

- Valve is push button activated and comes equipped with automatic diaphragm pressure regulator to allow the valve to function under varying water pressures between 20-90 PSI; keeping the stream constant throughout the drinking process.
- Connection is 1/4" IPS inlet and outlet.

Cat. No. 33722

Phone: 1-800-523-5130 • Fax: 1-800-338-1867 • [www.plumbmaster.com](http://www.plumbmaster.com)