



PlumbMaster, Inc.




NEW PRODUCT

Hot Water Extender Tempering Valve

- 1/2" Sweat Connections
- Brass Valve Body
- Simple Maintenance Thermostat Assembly is Easily Removed and Replaceable as a Unit
- Temperature Range 120° to 160°F
- "Finger Tip" Dial adjustment Cap
- Stainless Steel Springs
- OEM Ref. No. 70A-F
- Not For Sale in CA & VT



Thermostat and Bonnet Assembly

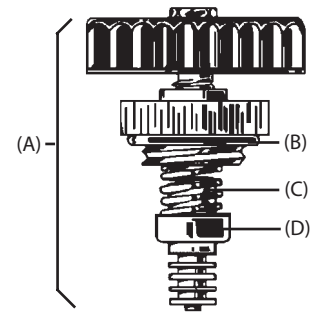


Cat. No. 59240 Watts 70A-F 1/2" Tempering Valve

Cat. No. 59241 Watts 70A-RK 1/2" or 3/4" Tempering Valve Repair Kit
Includes O-ring (B), Spring (C) and Thermostat Assembly (D)

High Capacity Feed Water Pressure Regulator

- 1/2" Union Solder Inlet Connection
- Tight Seating Check Valve
- Purge Lever for Manual Purging
- Stainless Steel Strainer to Protect the Valve Disc from Fouling
- Maximum Temperature: 212°F
- Maximum Working Pressure: 100 PSI
- Adjustment Range: 10 – 25 PSI set at 15 PSI
- OEM Ref. No. S1156F

Cat. No. 59242

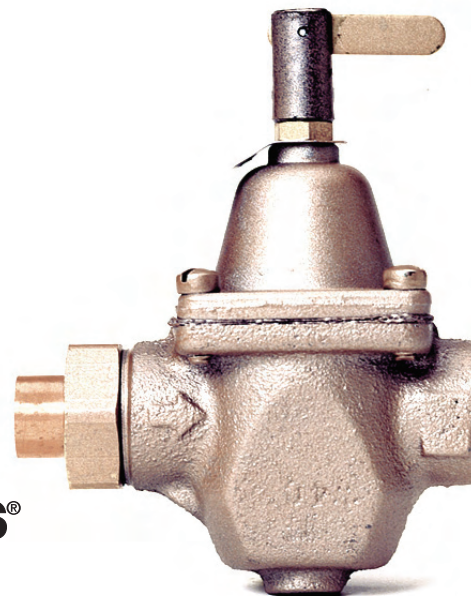

Phone: 1-800-523-5130 • Fax: 1-800-338-1867 • www.plumbmaster.com