



**PlumbMaster, Inc.**


**NEW PRODUCT**

# SLOAN ECOS Dual-Flush Electronic Flushometers

- If the user is present for less than one minute and leaves the sensing zone or chooses the small override button, a reduced flush initiates eliminating liquid and paper waste, saving 1/2 gallon of water
- If the user is present for greater than one minute and leaves the zone or chooses the large override button, the full flush initiates eliminating solid waste and paper
- Reduces water volume by up to 30% when a reduced flush occurs
- PERMEX™ Synthetic Rubber Diaphragm with twin linear filtered bypass and vortex cleansing action
- Flex Tube Diaphragm designed for improved life and reduced maintenance
- ADA Compliant Sloan ECOS™ Electronic Dual Flush Battery Powered Infrared Sensor for automatic “No Hands” operation
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection
- Four (4) Size AA Batteries factory installed
- Infrared Sensor Range Adjustment Screw
- Chrome Plated Metal Handle Cap
- 1” I.P.S. Screwdriver Bak-Chek® Angle Stop
- Free Spinning, Vandal Resistant Stop Cap
- Adjustable Tailpiece
- High Back Pressure Vacuum Breaker Flush Connection with One-piece Bottom Hex Coupling Nut
- Spud Coupling and Flange for 1-1/2” Top Spud
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange w/Set Screw
- Diaphragm, Stop Seat and Vacuum Breaker molded from PERMEX™ Rubber Compound for Chloramine resistance ADA Compliant Manual Operation



71073

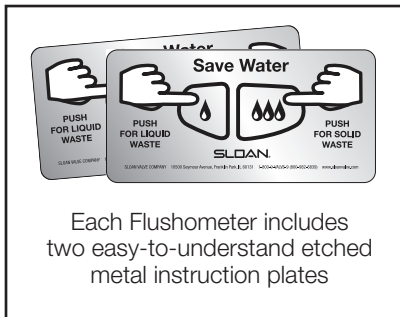

71075

Cat. No. 71073 ECOS 8111(1.6/1.1 GPF) Flushometer

Cat. No. 71075 ECOS RESS-C (1.6/1.1 GPF) Dual-Flush Retrofit Conversion Kit