

WOLVERINE BRASS, INC.

ESSENCE TWIN HANDLE SWING SPOUT LAUNDRY FAUCET

FAUCET CONSTRUCTION:


- CERAMIC DISK CARTRIDGES.
- MACHINED BRASS BODY WITH K COPPER WATERWAYS.
- ZAMAC#3 PLATED METAL HANDLES AND DECK PLATE.
- 1/2" IPS THREADED BRASS SHANKS 4" ON CENTERS.
- PLATED BRASS SWING SPOUT AND SPOUT NUT.

ESLO340 - CHROME
ESLO440 - BRUSH NICKEL



OPERATION:

- TWIN LEVER HANDLES.
- REQUIRES LESS THAN 5 LB FORCE TO OPERATE VALVE.
- 90° TURN FROM FULL OFF TO FULL ON.
- 3/4" HOSE THREAD SPOUT AERATOR ADAPTER.

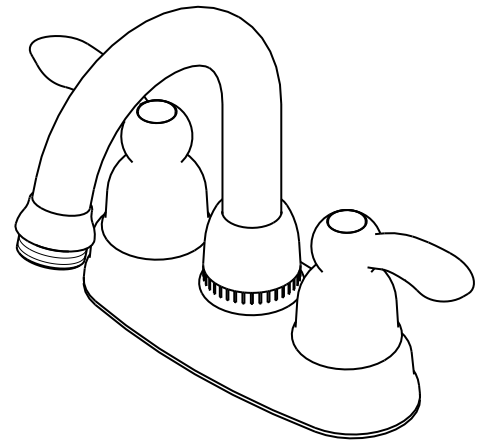

STANDARDS:

- DESIGNED AND MANUFACTURED TO COMPLY WITH CSA B-125, ASME A112.18.1M, NSF AND ADA STANDARDS.
- LOW LEAD COMPLIANT (0.25% Pb MAX).

MOUNTING SURFACE REQUIREMENTS:

- SURFACE THICKNESS 1-1/4" MAXIMUM.
- TWO (7/8" MIN TO 1-1/4" MAX DIA.) HOLES 4" ON CENTERS.

