

WOLVERINE BRASS, INC.

ESSENCE TWIN LEVER HANDLE KITCHEN FAUCET

ESKO360 - CHROME - LESS SPRAY
ESK7360 - CHROME - WITH SPRAY
ESK7400 - BRUSH NICKEL - WITH SPRAY


FAUCET CONSTRUCTION:

- CERAMIC DISK CARTRIDGES.
- MACHINED BRASS BODY WITH K COPPER WATERWAYS.
- CHROME PLATED BRASS SPOUT.
- ZAMAC#3 CHROME PLATED METAL HANDLES AND DECK PLATE.
- 1/2" IPS THREADED BRASS SHANKS 8" ON CENTERS.
- PLASTIC PUTTY PLATE.



OPERATION:

- TWIN LEVER HANDLES.
- REQUIRES LESS THAN 5 LB FORCE TO OPERATE VALVE.
- 90° TURN FROM FULL OFF TO FULL ON.
- 1.8 GPM (6.8 L/min) AERATOR.

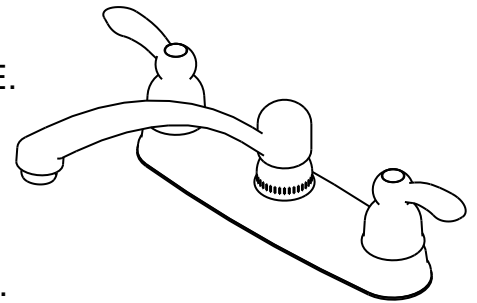

STANDARDS:

- DESIGNED AND MANUFACTURED TO COMPLY WITH CSA B-125, ASME A112.18.1M, NSF AND ADA STANDARDS.
- LOW LEAD COMPLIANT (0.25% Pb MAX).

MOUNTING SURFACE REQUIREMENTS:

- SURFACE THICKNESS 1-1/8" MAXIMUM.
- LESS SPRAY - TWO (7/8" MIN TO 1-1/4" MAX DIA.) HOLES 8" ON CENTERS.
- WITH SPRAY - THREE (7/8" MIN TO 1-1/4" MAX DIA.) HOLES 4" ON CENTERS.

